

LED Life Prediction: Towards A General Approach

Emil Radkov (eradkov@illumitex.com)


Presented by Andy Jackson

CORM Meeting, May 2009
Gaithersburg, MD

Outline:

- Need for LED life prediction
- Proposal for a new general approach
- Model examples & related learnings
- Additional comments & solutions for problem areas
- Future Work

How is LED life defined?

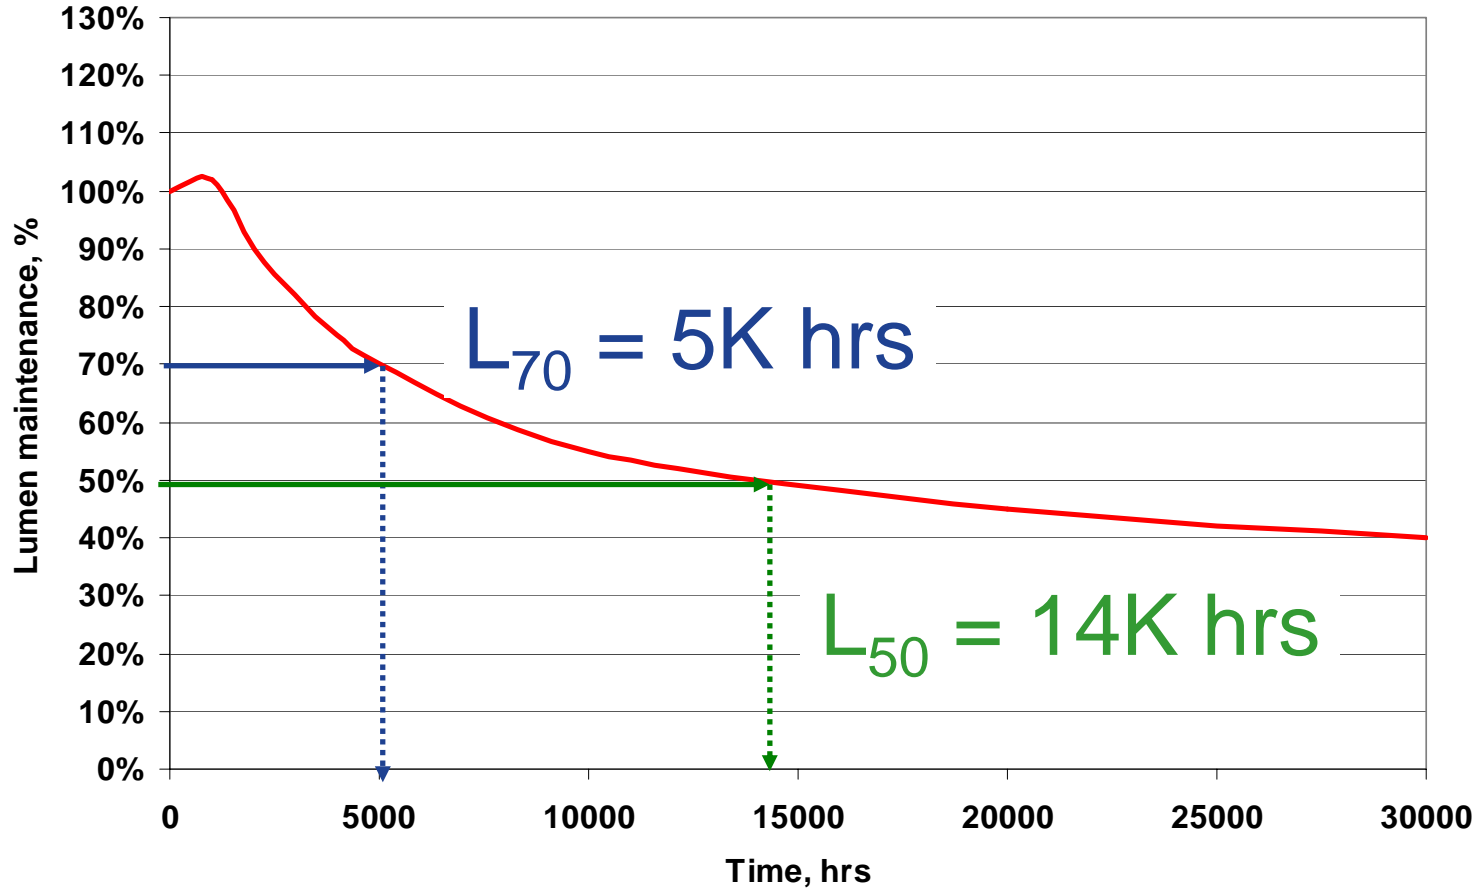

Lumen maintenance to predetermined levels used
(since catastrophic failures are rare for LEDs)

Problem: LED “useful” life is too long for a direct measurement (typ. 50K hrs, or 5.7 yrs expected)

Goal: Project Lumen Maintenance curve using data collected over 6K-10K hrs of LED operation (either “regular” or “accelerated”)

Implication: Far extrapolation needed (as in from Valentine’s Day to New Year’s Eve)

Issue: LM curve can be complex and of varying shape for different LED packages

Desired Properties of a Prediction Method

- Applicable to all LED packages
- LM-80 based
- Unambiguous (1 data set = 1 interpretation)
- Self-contained (providing all “tools”/references)
- Motivating to continue measurements beyond 6000 hrs (not currently required by LM-80)
- Providing statistical confidence & time limits to projection.

A new general quantitative approach:

1. Write a set of **LM rate equation formulas** by combining systematically any potentially relevant terms.
2. Differentiate the available LM data numerically.
3. Fit LM rate to the different rate equations.
4. Solve the fitted LM rate equations to obtain the LM projection by each of them.
5. Verify the projected LM curves by additional experimental measurements to choose the best model.

Based on broader scientific approach to modeling growth & decay problems

Mathematical implementation of the approach:

A general equation for the LED lumen decay rate can be written as:

$$dl_v/dt = f(l_v, t).$$

For a number of examples, f may be of the form $k_1 + k_2 l_v + k_3/t$,


where $k_1 - k_3$ are rate parameters, subject to experimental determination.

The f form shown above incorporates the following 8 rate equation models ("0" is for "not used" and "1" is for "used" in the corresponding equation):

Eqn. #	k_3	k_2	k_1	Decay Rate Model	Closed Form Solution
0	0	0	0	$dl_v/dt = 0$	$l_v = l_v^0$
1	0	0	1	$dl_v/dt = k_1$	$l_v = l_v^0 + k_1(t-t^0)$
2	0	1	0	$dl_v/dt = k_2 l_v$	$l_v = l_v^0 \exp[(k_2(t-t^0))]$
3	0	1	1	$dl_v/dt = k_1 + k_2 l_v$	$l_v = (l_v^0 + k_1/k_2) \exp[k_2(t-t^0)] - k_1/k_2$
4	1	0	0	$dl_v/dt = k_3/t$	$l_v = l_v^0 + k_3 \ln(t/t^0)$
5	1	0	1	$dl_v/dt = k_1 + k_3/t$	$l_v = l_v^0 + k_1(t-t^0) + k_3 \ln(t/t^0)$
6	1	1	0	$dl_v/dt = k_2 l_v + k_3/t$	None Available
7	1	1	1	$dl_v/dt = k_1 + k_2 l_v + k_3/t$	None Available


A complete Excel workbook is available separately

Examples: Model 0 (“flat line”)

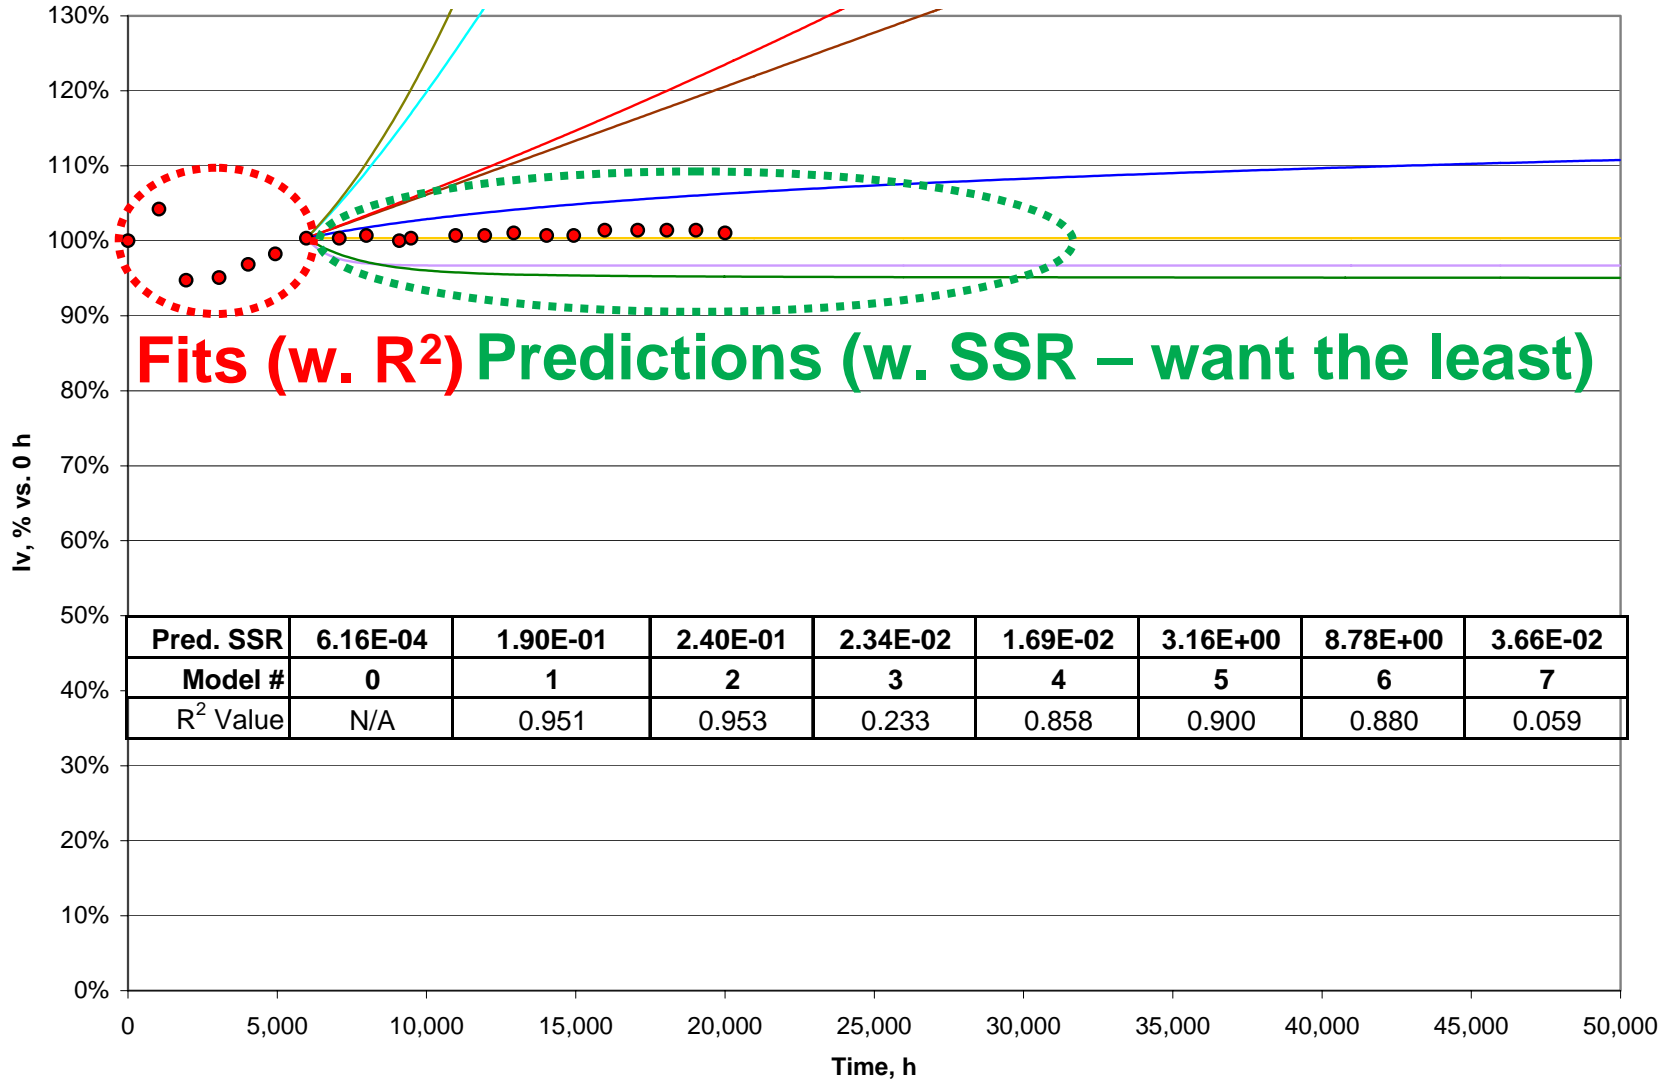


Note high R^2 values for Models 1, 2 and 5

Examples: Model 1 (straight line)

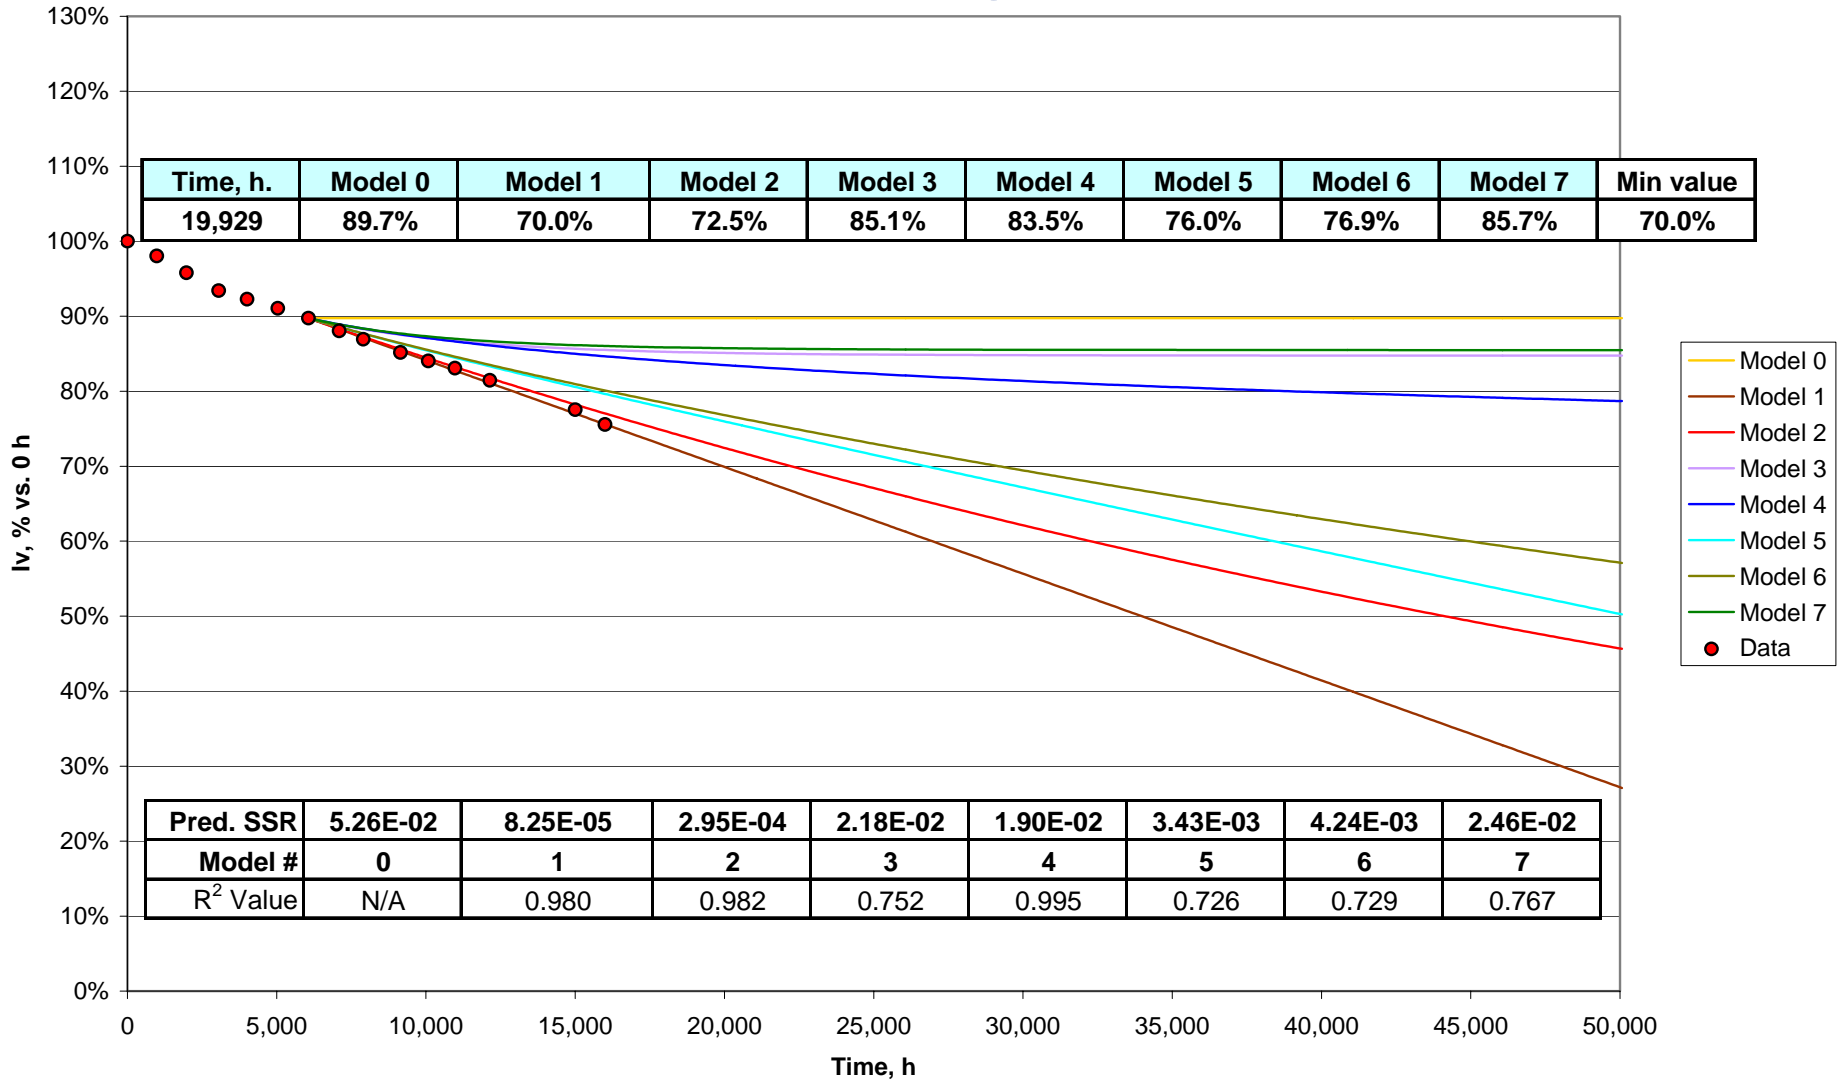


Note higher R², much higher SSR for Model 4

Examples: Model 2 (simple exponential)

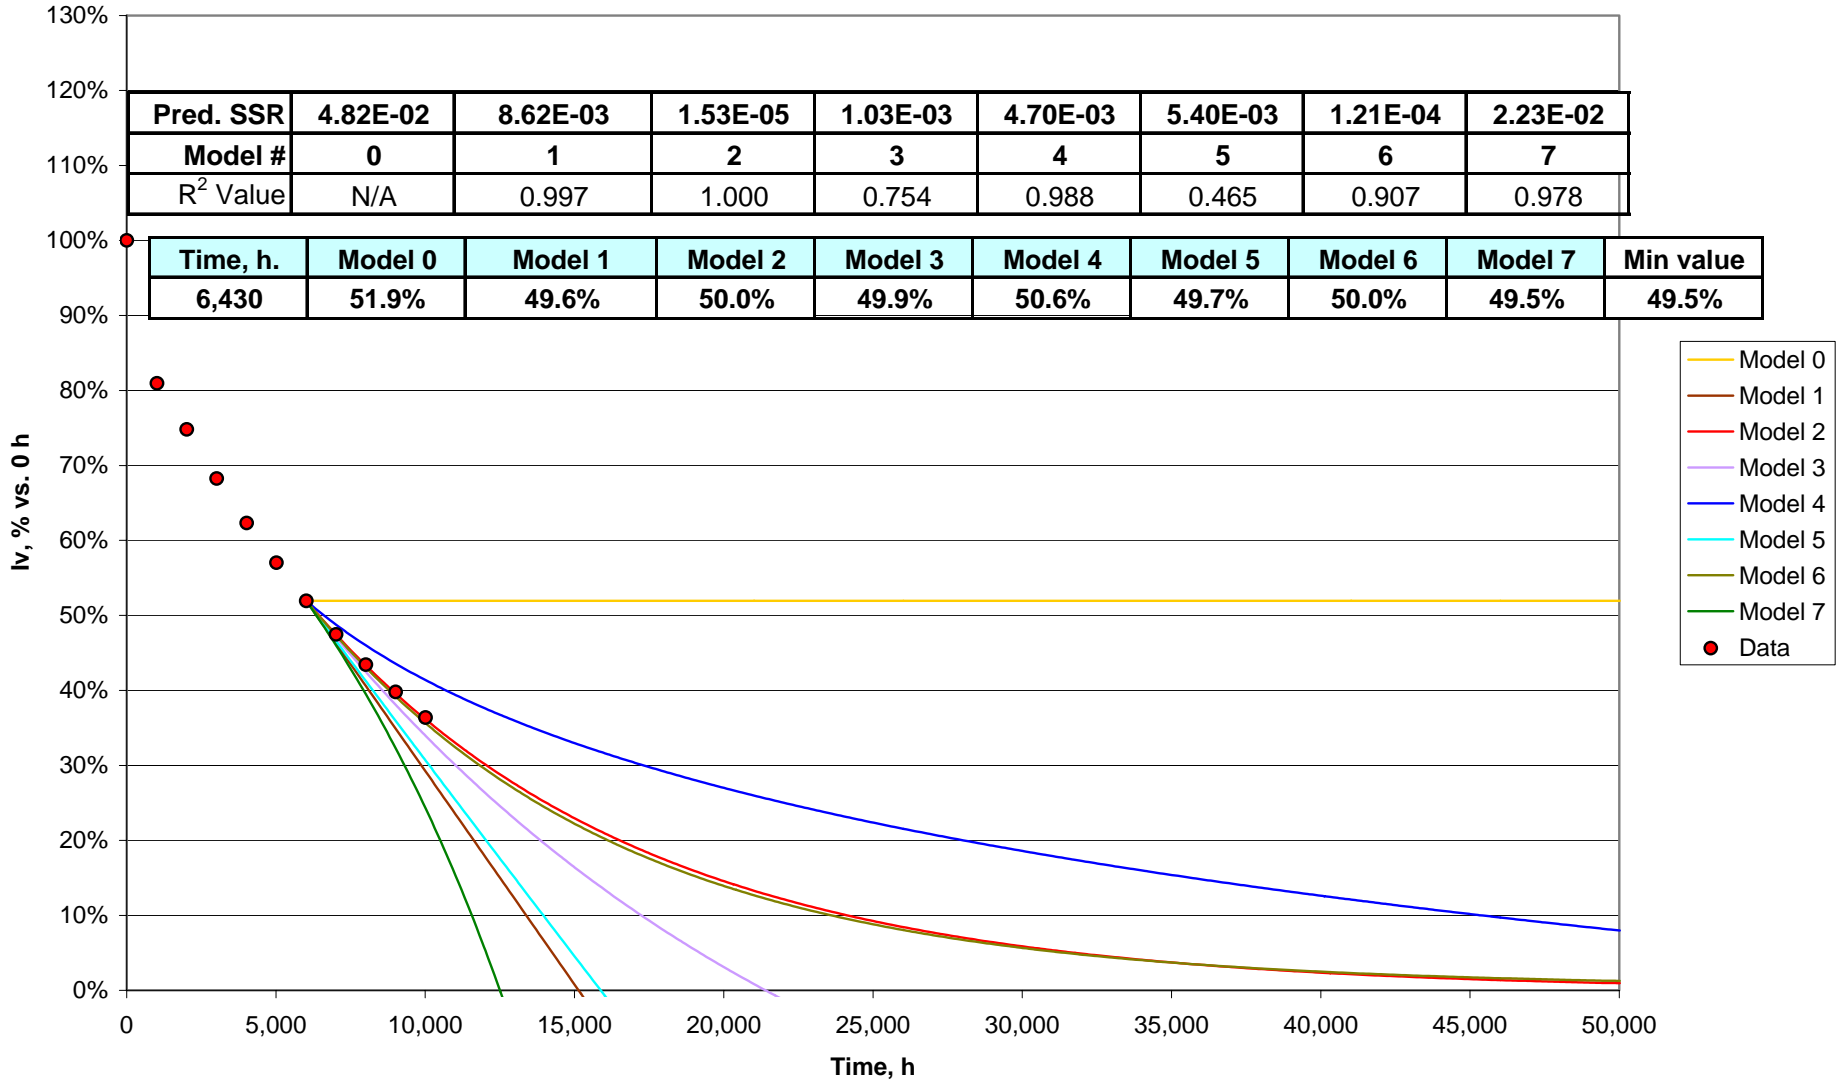


**Currently, widely used
model by LED industry**

Examples: Model 3 (two parameters)

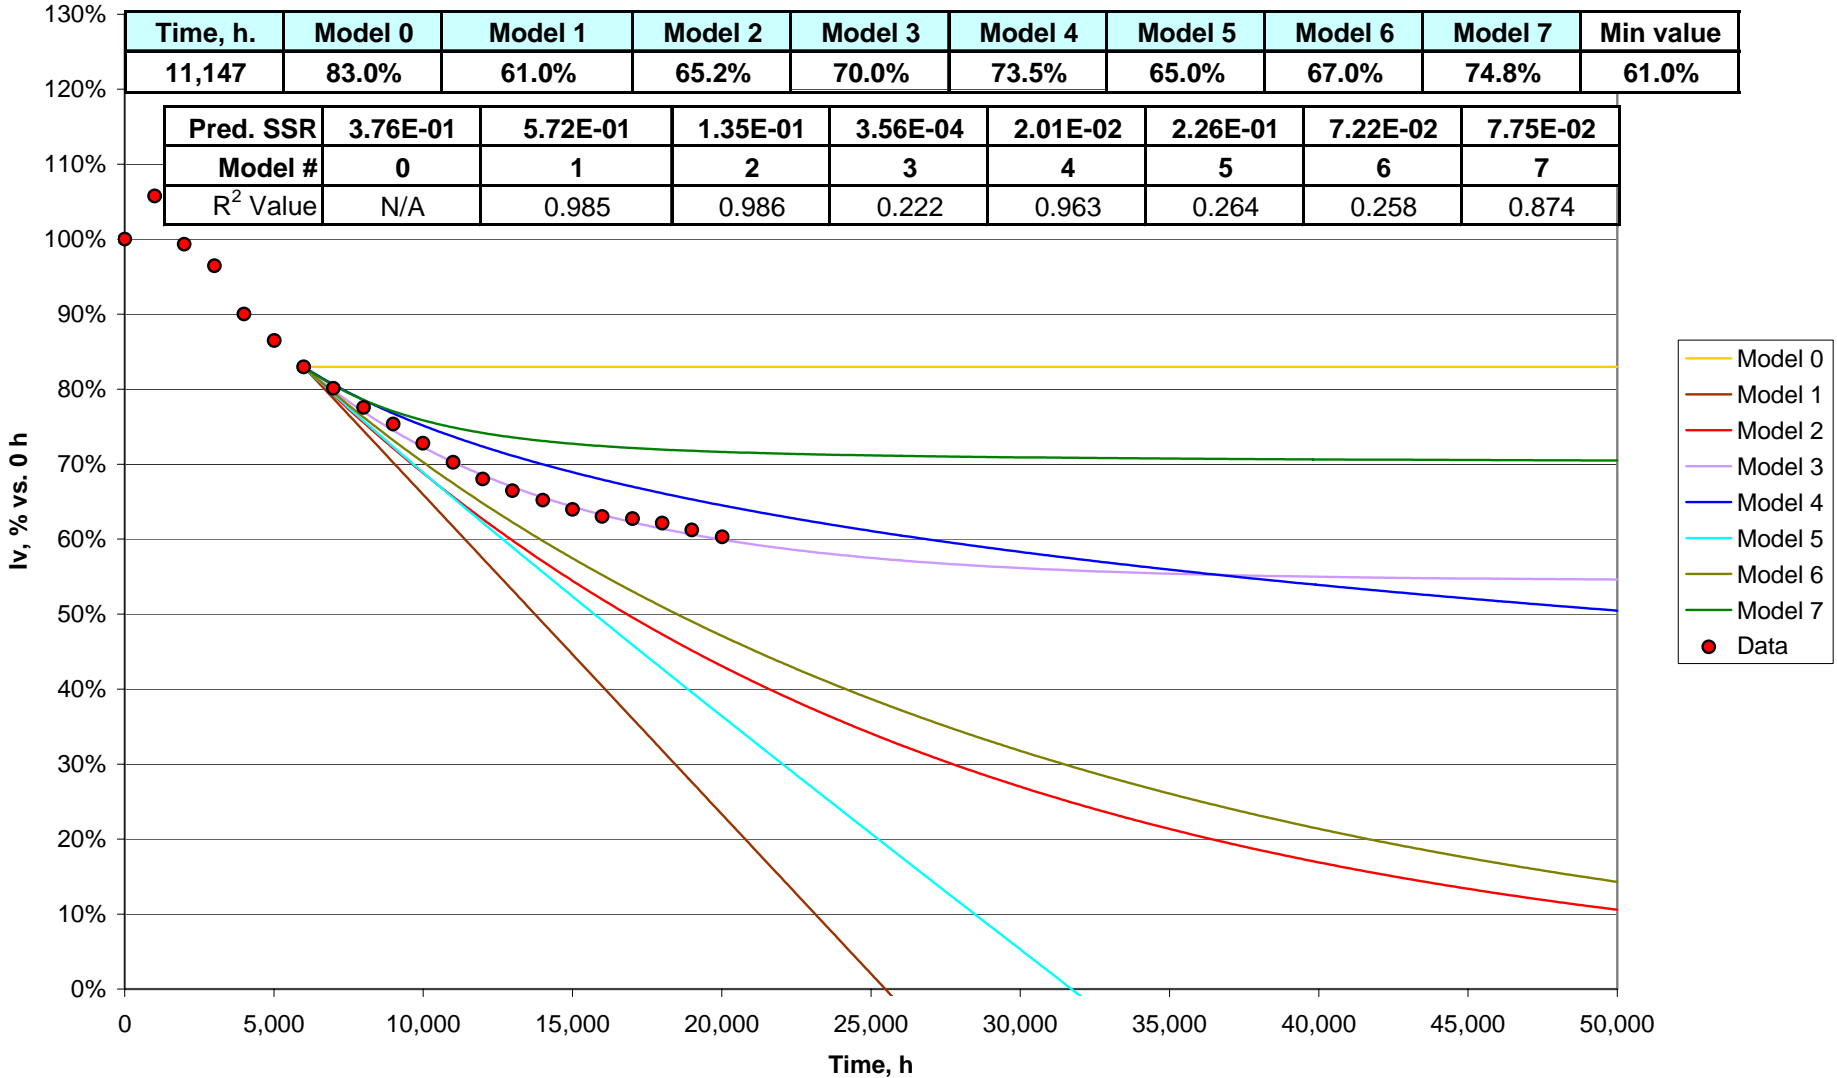


Only Model 3 gives exact prediction for L70 in this case (note R² value)

Examples: Model 4 (simple logarithmic)

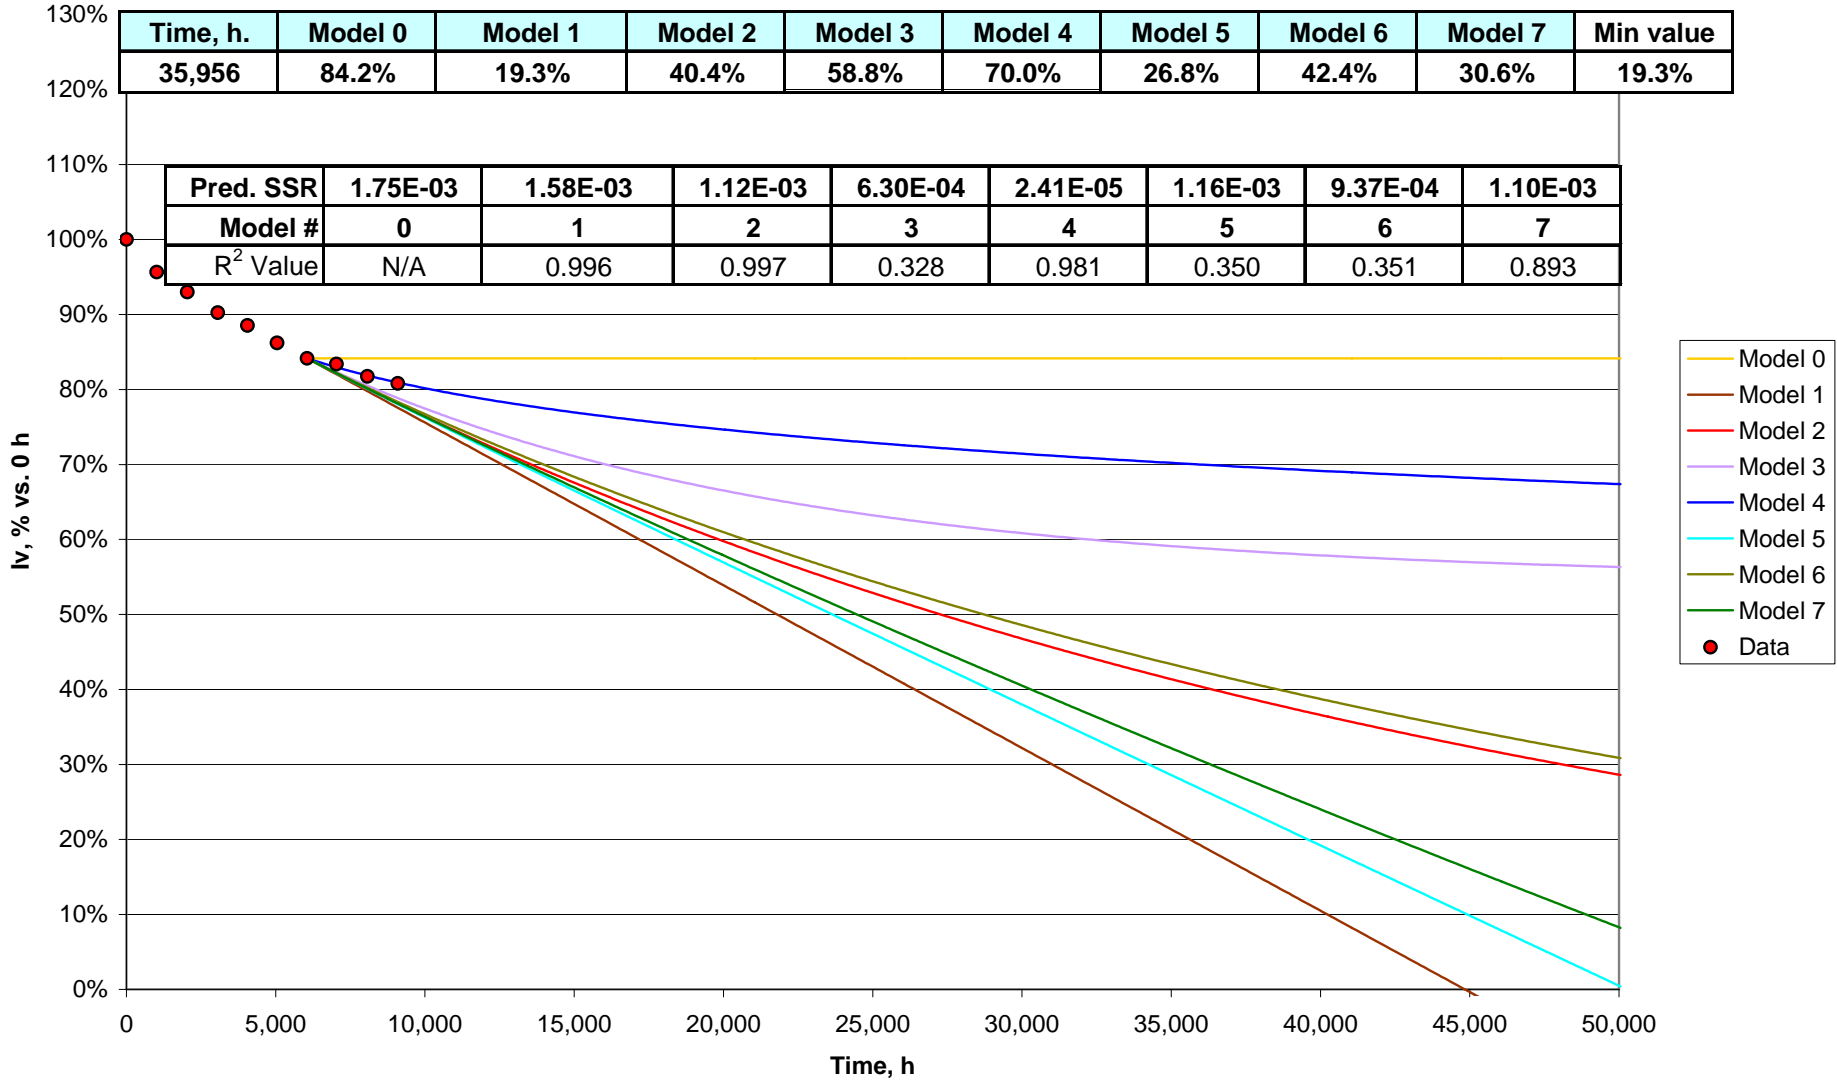


Note higher R², SSR values for Models 1 and 2

Examples: Model 5 (two parameters)

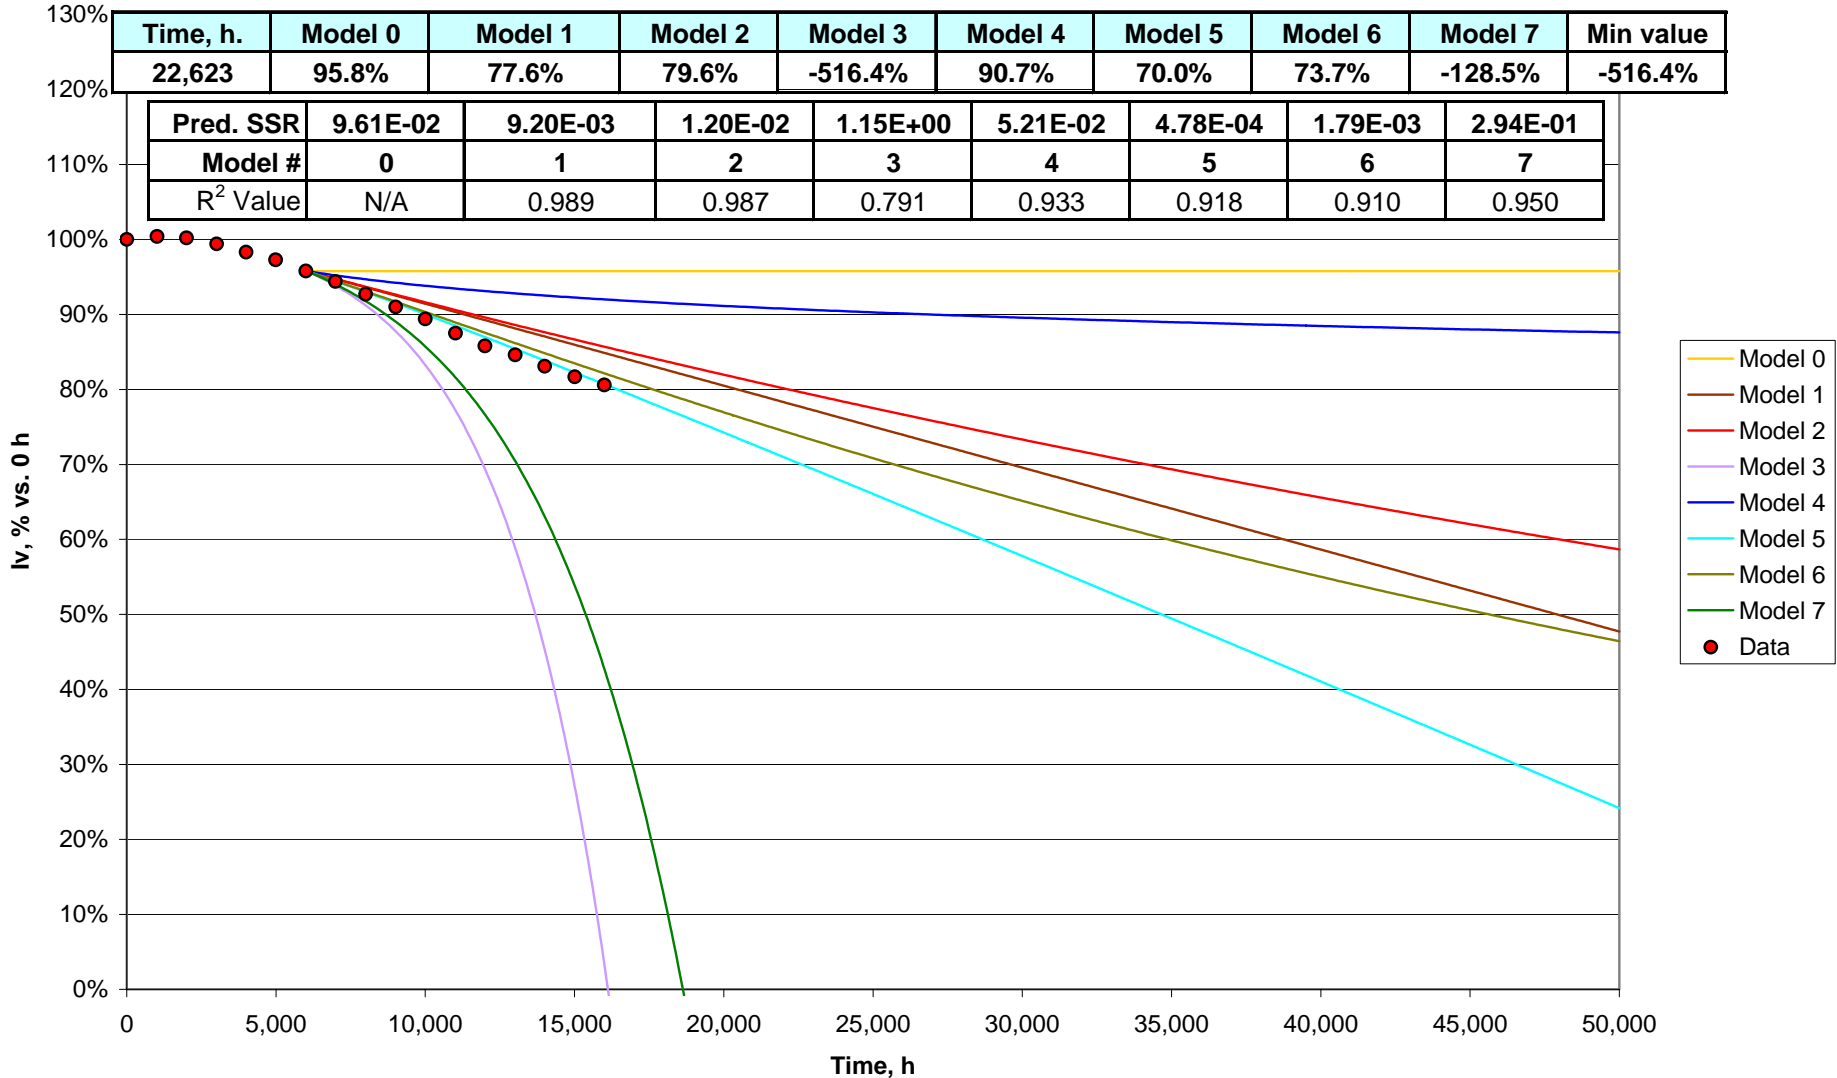


Note higher R², SSR values for Models 1, 2, 4 and 7

Examples: Model 6 (two parameters)

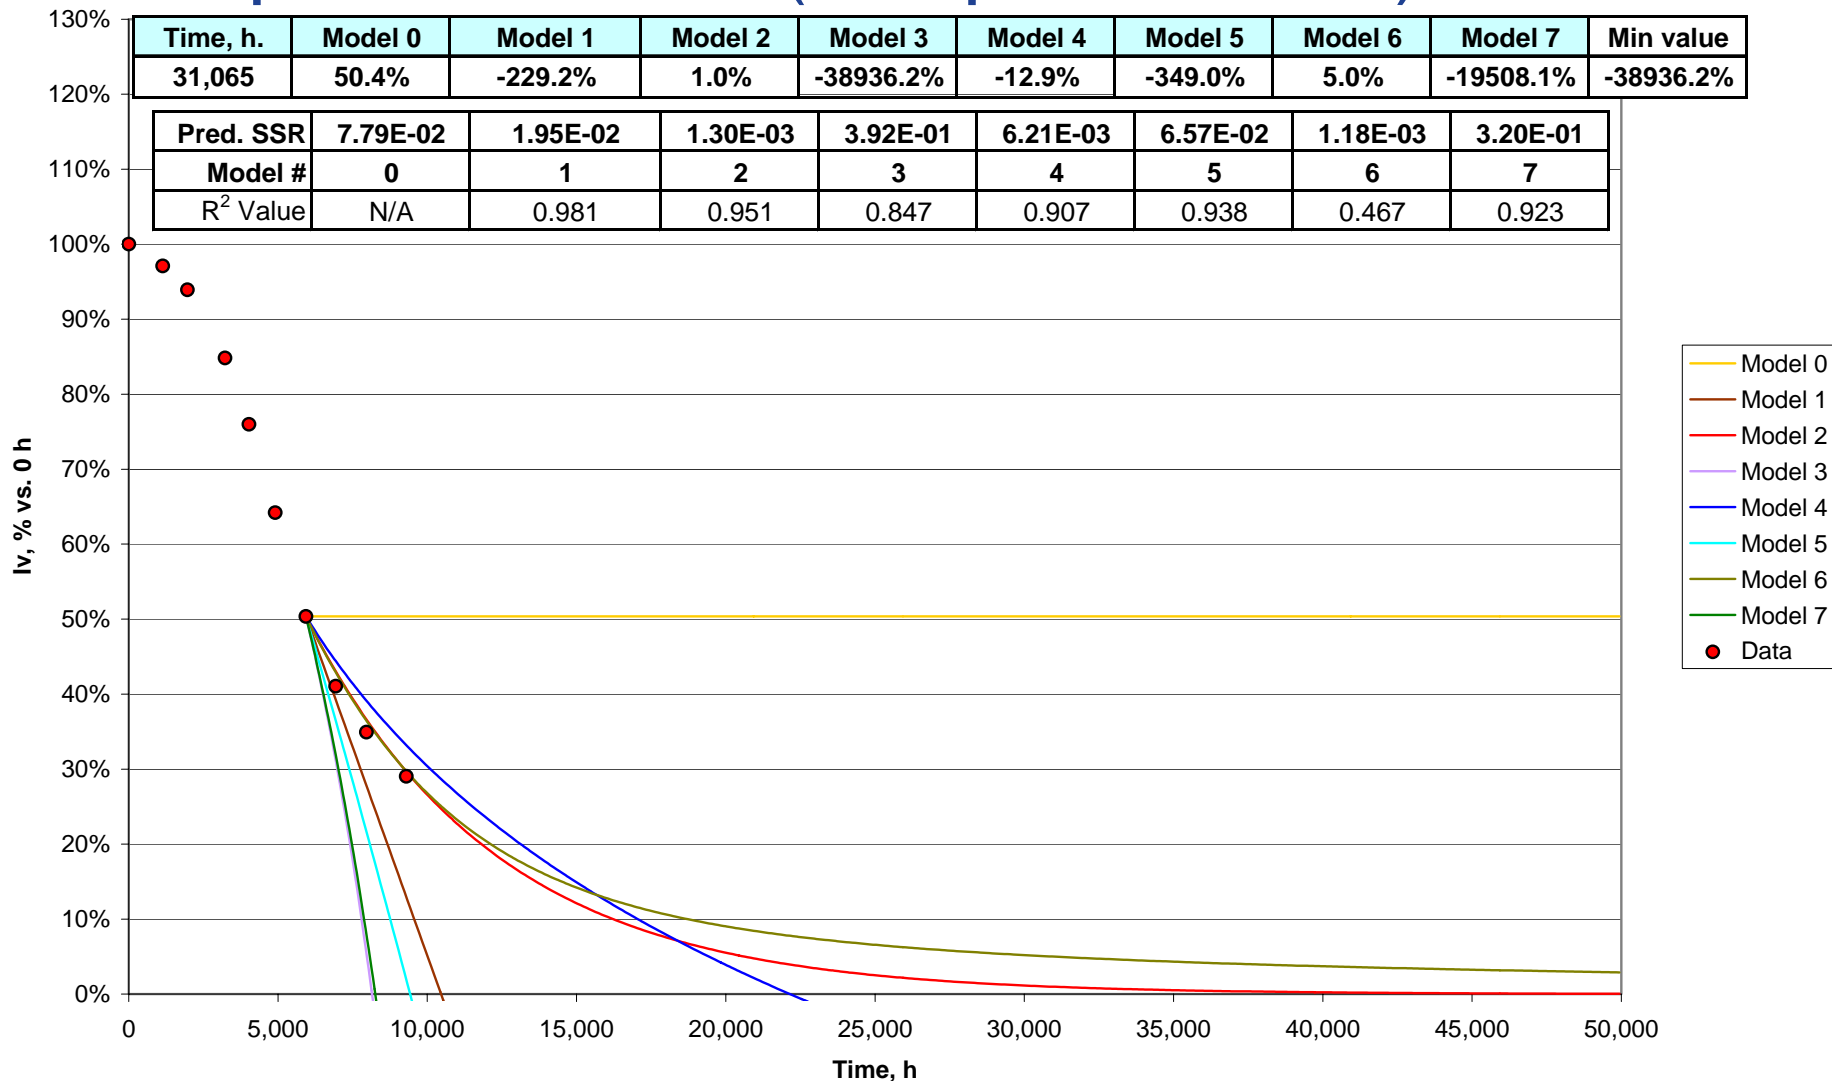

Note higher R², SSR values for Models 1, 2, 3, 4, 5 and 7

Examples: Model 7 (three parameters)

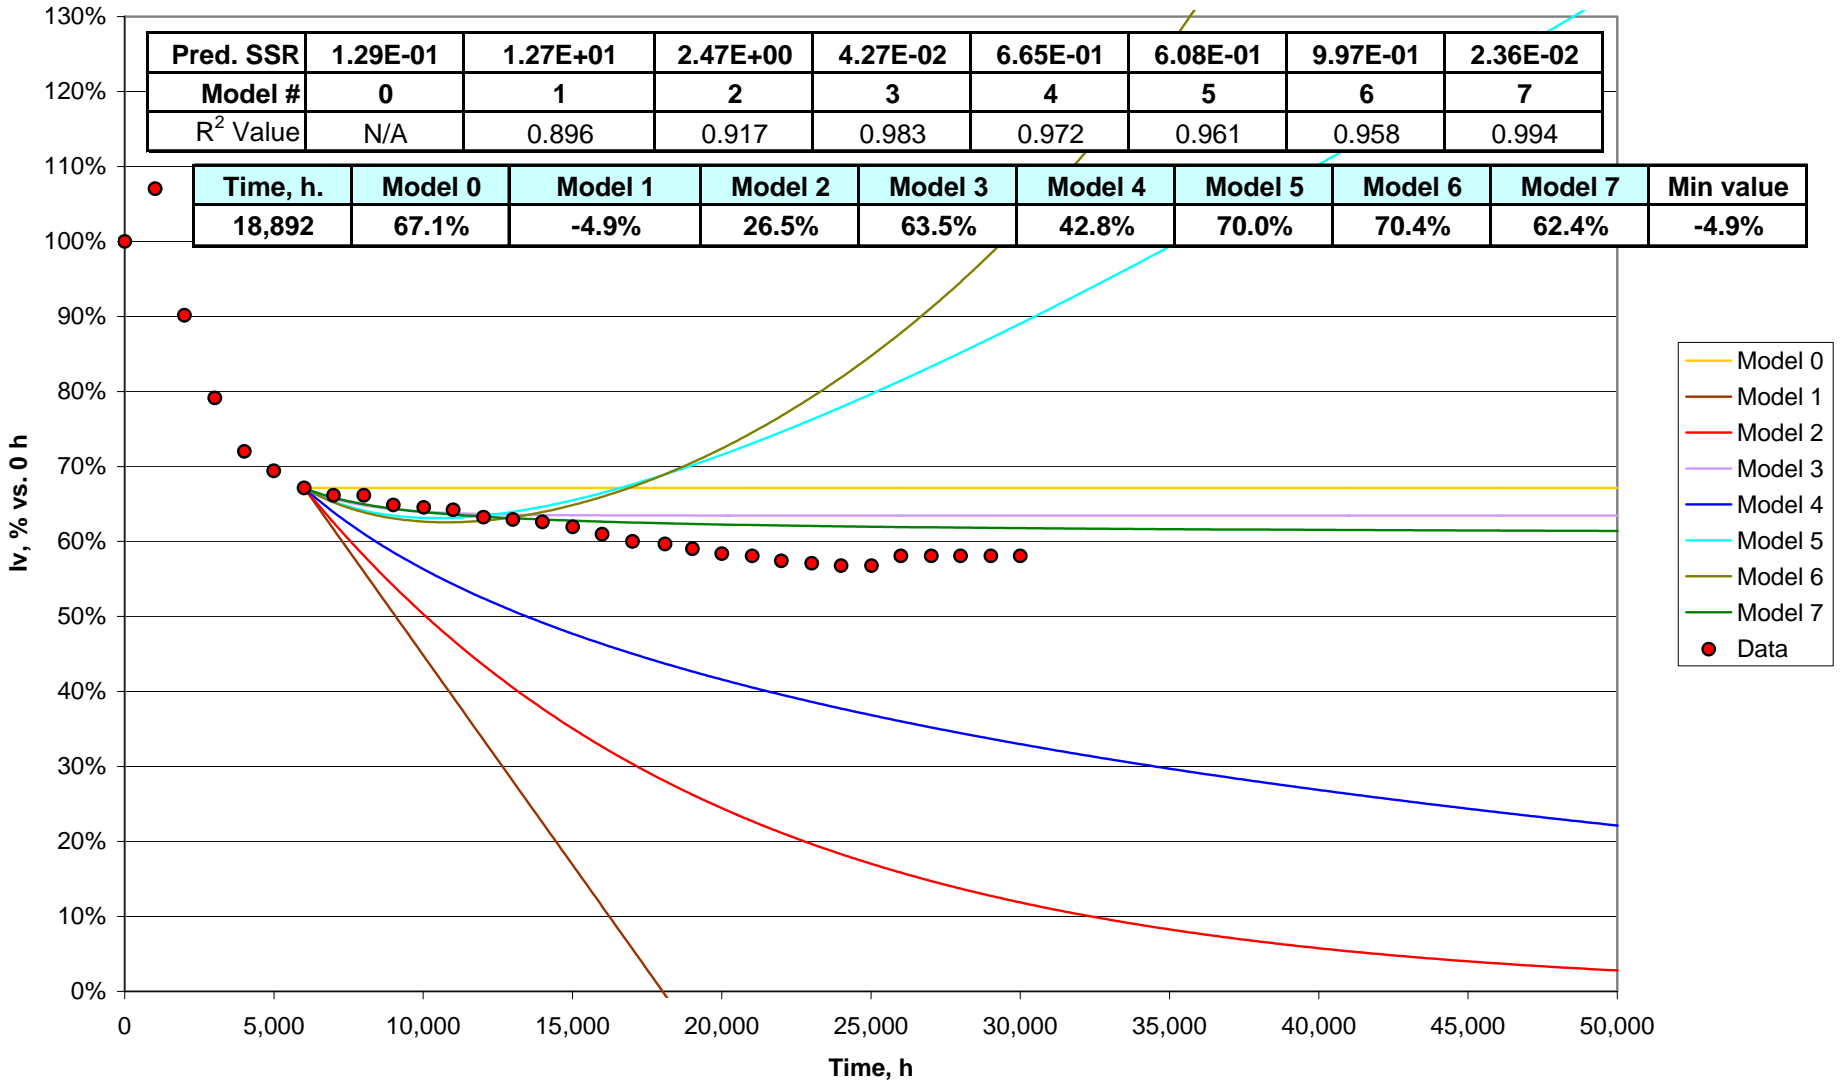

Note that Models 5 and 6 predict an incorrect 2nd L70 value

Additional comments on Model 0

Problem: No L70 prediction can be made for LEDs following Model 0, based on 6K-10K data

Implication: The most reliable LEDs would (ironically) have to be tested for the longest time, in order to provide a good estimate for L70.

Proposed Solution: Request provisional approval for LEDs with LM following Model 0, if this model is confirmed by data from 6K to 10K hrs.

Model 0 reflects “ideal” LM behavior which should not be unduly penalized

Additional comments on lumen decay accelerating over time (“cliff” type LM)

Problem: Although 4 of the proposed models (Models 3, 5, 6 and 7) are capable of “sensing” accelerating decay, they may miss it, if it were to manifest itself after 6K hrs.

Implication: A L70 value much larger than the real one may be projected by an incompletely validated model.

Proposed Solution: Recalculate L70 projection for any chosen model, by including newer data points (measured after 6K hrs) at the expense of older ones.

Any decrease in a L70 projection when recalculated on more data is a red flag

Additional comments on poor fit of the experimental data by all models

Problem: It is conceivable that for some LEDs, the LM curve may not fit well any of the models previously presented, especially in the L70 region.

Implication: No good life projections would be possible (at least, without extending the data collection further).

Proposed Solution: Introduce new models into the set (e.g. by adding new terms, such as k_4t , etc.). However, need to use Occam's razor (have no more parameters than absolutely needed for an acceptable fit).

The proposed set of models may be expanded further as necessary

Summary:

- All 8 LM models proposed here are found in real LEDs.
- R^2 of fitted models is not trustable for extrapolation.
- SSR on validation points is more appropriate (but a “sanity check” for unbound predictions is also needed).
- Regulatory leeway should be requested for LEDs having a “flat” (Model 0) type LM curve over the first 10K hrs.
- Extra care should be taken to detect accelerating lumen decay, especially if manifesting after 6K hrs.
- Additional models may be added as needed.

Future work:

- Determine safeguard for un-validated projections based on no more than 6000 hrs of testing (using the worst prediction among all models proposed).
- Determine time limit for “too good to be true” projections based on testing duration (6x limit proposed).
- Determine number of minimum validation points for SSR calculation (4 proposed).
- Determine experimental noise budget for SSR in an acceptable model (10^{-4} per validation point proposed).
- Determine procedure for uncertainty interval calculation (Weibull analysis proposed).

Acknowledgments:

S. Aanegola (GE)

K. Dowling (Philips)

G. Duffy (GE)

M. Hodapp (Philips)

A. Jackson (Philips)

C. Jacob (GE)

B. Knijnenburg (Philips)

R. Kotchenreuter (Osram)

N. Narendran (RPI)

Y. Ohno (NIST)

E. Richman (DOE)

H. Stoyan (Osram)

A. Suzuki (Hitachi)

D. Szombatfalvy (GE)